
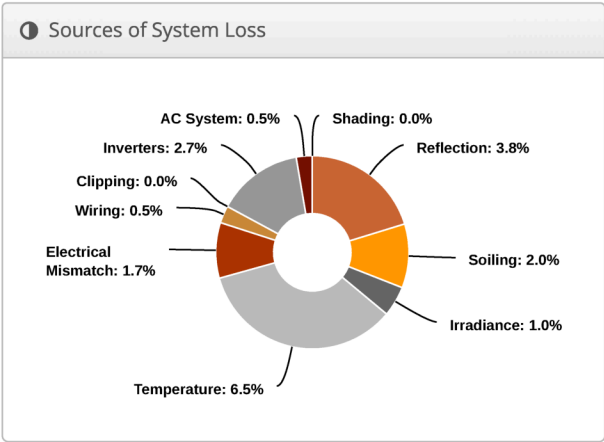
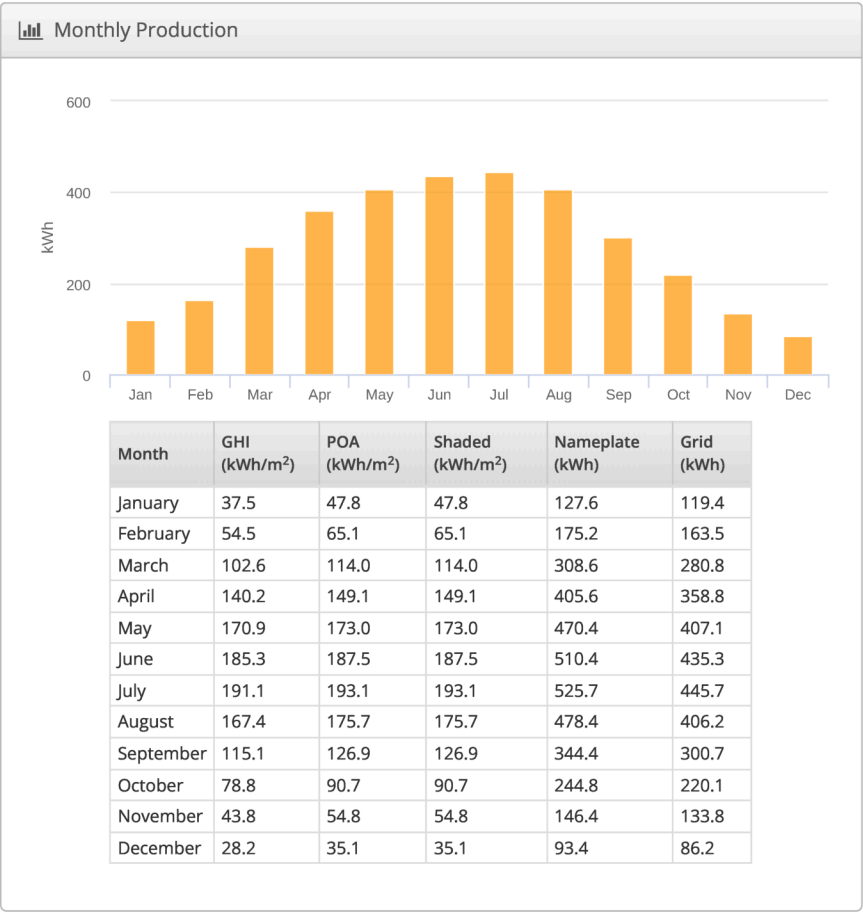


Design 1 resita , republicii , nr 28 bl 2, 45.3305727,21.8689994

Report	
Project Name	resita , republicii , nr 28 bl 2
Project Address	45.3305727,21.8689994
Prepared By	Cosmin Turbatu fotovoltaice@proxib.ro

System Metrics	
Design	Design 1
Module DC Nameplate	2.88 kW
Inverter AC Nameplate	3.00 kW Load Ratio: 0.96
Annual Production	3.358 MWh
Performance Ratio	82.7%
kWh/kWp	1,167.9
Weather Dataset	TMY, 10km Grid, Meteonorm 8 (meteonorm_v8)
Simulator Version	9f8debac87-fd0e1c9c8c-12e8fa535e-af21278e20

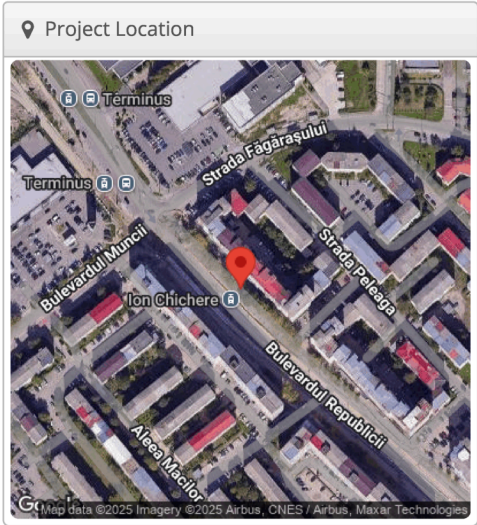

⚡ Annual Production			
	Description	Output	% Delta
Irradiance (kWh/m²)	Annual Global Horizontal Irradiance	1,315.5	
	POA Irradiance	1,412.9	7.4%
	Shaded Irradiance	1,412.9	0.0%
	Irradiance after Reflection	1,359.4	-3.8%
	Irradiance after Soiling	1,332.2	-2.0%
	Total Collector Irradiance	1,332.2	0.0%
Energy (kWh)	Nameplate	3,831.0	
	Output at Irradiance Levels	3,794.5	-1.0%
	Output at Cell Temperature Derate	3,548.8	-6.5%
	Output after Electrical Mismatch	3,487.1	-1.7%
	Optimal DC Output	3,468.2	-0.5%
	Constrained DC Output	3,468.1	0.0%
	Inverter Output	3,374.5	-2.7%
	Energy to Grid	3,357.6	-0.5%
Temperature Metrics			
Avg. Operating Ambient Temp		14.6 °C	
Avg. Operating Cell Temp		30.1 °C	
Simulation Metrics			
Operating Hours		4613	
Solved Hours		4613	

☁️ Condition Set												
Description	Condition Set 1											
Weather Dataset	TMY, 10km Grid, Meteonorm 8 (meteonorm_v8)											
Solar Angle Location	Meteo Lat/Lng											
Transposition Model	Perez Model											
Temperature Model	Sandia Model											
Temperature Model Parameters	Rack Type				a		b		Temperature Delta			
	Fixed Tilt				-3.56		-0.075		3°C			
	Flush Mount				-2.81		-0.0455		0°C			
	East-West				-3.56		-0.075		3°C			
	Carport				-3.56		-0.075		3°C			
Soiling (%)	J	F	M	A	M	J	J	A	S	O	N	D
	2	2	2	2	2	2	2	2	2	2	2	2
Albedo	J	F	M	A	M	J	J	A	S	O	N	D
	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Rear Mismatch Loss	10%				Rear Shading Factor				5%			
Module Transparency	0%											
Irradiation Variance	5%											
Cell Temperature Spread	4° C											
Module Binning Range	-2.5% to 2.5%											
AC System Derate	0.50%											
Module & Component Characterizations	Type	Component					Characterization					Bifacial
	Module	LR5-72HTH 575M (Longi)					Spec Sheet Characterization, PAN					False
	Inverter	SUN2000-3KTL-L1 (Huawei)					Spec Sheet					N/A

Components		
Component	Name	Count
Inverters	SUN2000-3KTL-L1 (Huawei)	1 (3.00 kW)
Strings	6 mm2 (Copper)	1 (39.7 m)
Module	Longi, LR5-72HTH 575M (575W)	5 (2.88 kW)

Wiring Zones									
Description		Combiner Poles		String Size		Stringing Strategy			
Wiring Zone		-		3-10		Along Racking			

Field Segments									
Description	Racking	Orientation	Tilt	Azimuth	Intrarow Spacing	Frame Size	Frames	Modules	Power
Field Segment 1	Flush Mount	Portrait (Vertical)	15°	226.90211°	0.5 m	1x1	5	5	2.88 kW

Detailed Layout2

